KWIK ZIP Graphic System

MEASUREMENT REQUIREMENTS

MEASUREMENTS: EPIC Media Group requires that all Trucks/Trailers or Rear Doors are properly measured with the respective measurement forms, including a full view picture of each truck side or rear door with a Truck/Trailer ID or any other reference number. Also if there's any hardware that sticks out more than a quarter of an inch and may interfere with the application of the Frame System, the customer is responsible to remove it. Any further modifications that **EPIC** has to perform will slow down the installation process and require an additional fee.

Measurements are the most important part of the production process, we need everyone to provide the correct and accurate measurements for each Truck/Trailer or Rear Door. **EPIC** is not responsible for any wrong measurement provided by the customer or any other third party. Please follow all instructions from the appropriate form.

GETTING HELP: Our goal is to make sure that the measurement process is done correctly, we have created measurement forms for the most common type of vehicles, if you think that our measurement forms are not appropriate for your needs, we will customize one for you.

REMEMBER: EPIC IS JUST A PHONE CALL AWAY!

Any questions, please call: **EPIC Media Group** at 310-827-8800 • Fax: 310-827-5800

READ BEFORE MEASURING

The *KWIK ZIP™ Frame* by: EPIC Media Group LLC

SOME SUGGESTIONS FOR MEASURING... PLEASE READ!

CORRECT, ACCURATE MEASUREMENTS ARE THE MOST IMPORTANT PART OF THE PRODUCTION PROCESS. PLEASE FOLLOW ALL DIRECTIONS VERY CAREFULLY.

You will need:

25' tape for vertical measurements

100' tape for horizontal measurements

*Make sure the end of the 100' tape is pulled out straight to get the first inch of measurement.

Piece of *KWIK ZIP* Frame



*This is Helpful, but not necessary

3/4" of clearance from edge of rivet to edge of rivet is required.

Determine where you have the 3/4" necessary clearance and measure from that outermost identified point.

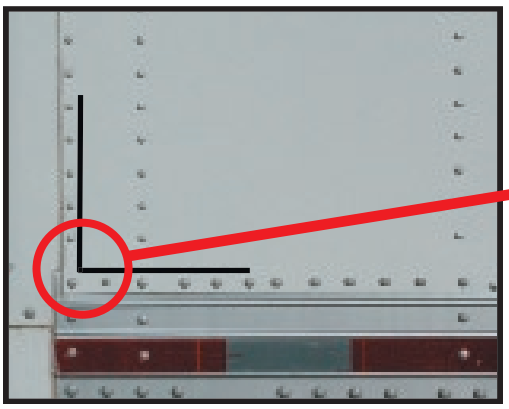

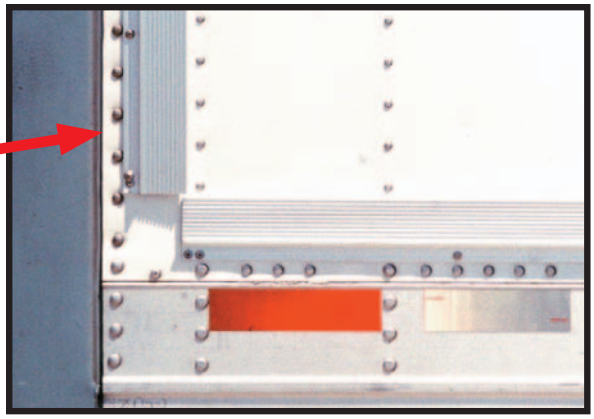

*Example of Frame Placement

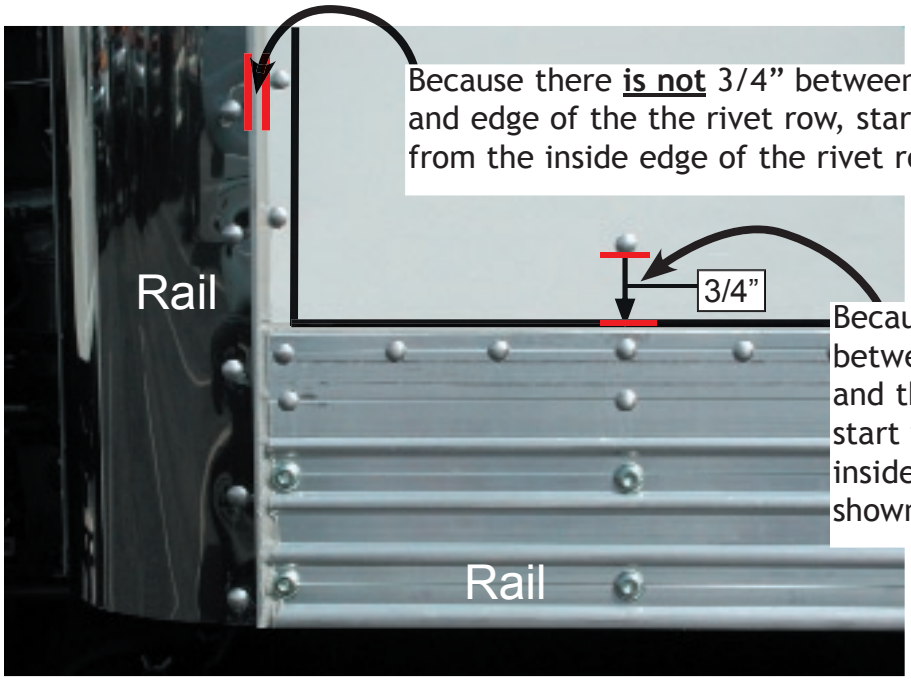

Because there **is not** 3/4" between the edge of the rail and edge of the the rivet row, start your measurements from the inside edge of the rivet row as pictured.

Because there **is**, 3/4" clearance between the edge of the rivet row and the edge of the bottom rail, start your measurement at the inside edge of the bottom rail as shown.

KWIK ZIP FRAME MEASURING PROTOCOL COVER PAGE (1-2)

605 S. Douglas St., El Segundo, CA 90245 • OFFICE: 310-827-8800 • FAX: 310-827-5800 • www.epicmediagroup.com

STEP 1: Company information

COMPANY: CUSTOMER NAME:

DIST. CENTER ADDRESS:

MEASURED BY: DATE:

PHONE: FAX:

NOTES:

STEP 2: Truck ID

UNIT #:

LIC. #:

VIN #:

MAKE:

YEAR BUILT:

Back door SWING ROLL UP

STEP 3: Please answer the following questions by checking the appropriate box

	YES	NO
1: Does the truck have horizontal ribs or corrugations?  	☐	☐
2: Is the truck side flat, aluminum? (it would have lots of rivets) 	☐	☐
3: Is the truck side FRP? (Fiberglass Reinforced Plywood, will have few rivets) 	☐	☐
4: Is there any damage where the frame will lay: Driver's side? Passenger side?  	☐	☐
5: Is the top front corner of the trailer bull-nosed? 	☐	☐
6: Are there any reflectors that need to be relocated? HAZMAT signs?  	☐	☐
7: Is there any conspicuity tape where the frame will lay? 	☐	☐

QUESTIONS?

Alex Perez • Measurements & Installations • CELL: (310) 889-5099 • OFFICE: (310) 827-8800
alex@epicmediagroup.com

KWIK ZIP FRAME MEASURING PROTOCOL BOX TRUCK

(2-2)

605 S. Douglas St., El Segundo, CA 90245 • OFFICE: 310-827-8800 • FAX: 310-827-5800 • www.epicmediagroup.com

STEP 1: Truck information

UNIT #:	**COMPANY:**		
LIC. #:	VIN #:	MAKE:	YEAR BUILT:

THIS IS A SAMPLE FOR MARKING MEASUREMENT POINTS

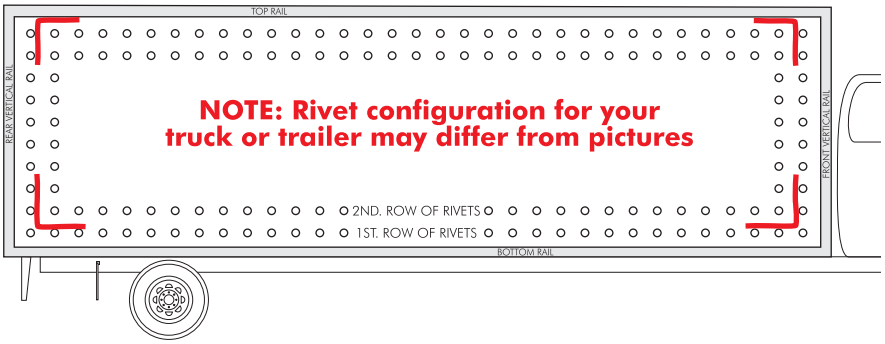

NOTE: Rivet configuration for your truck or trailer may differ from pictures





Measurement Points are the points from where you decide* to start and end measuring. It is important to draw measurement points that meet at all 4 corners as these will be the **Installation Points** for the *outer* edge of the frame.

STEP 2: Following the sample draw measurement points. Draw any hardware or damage that may interfere with the frame installation.

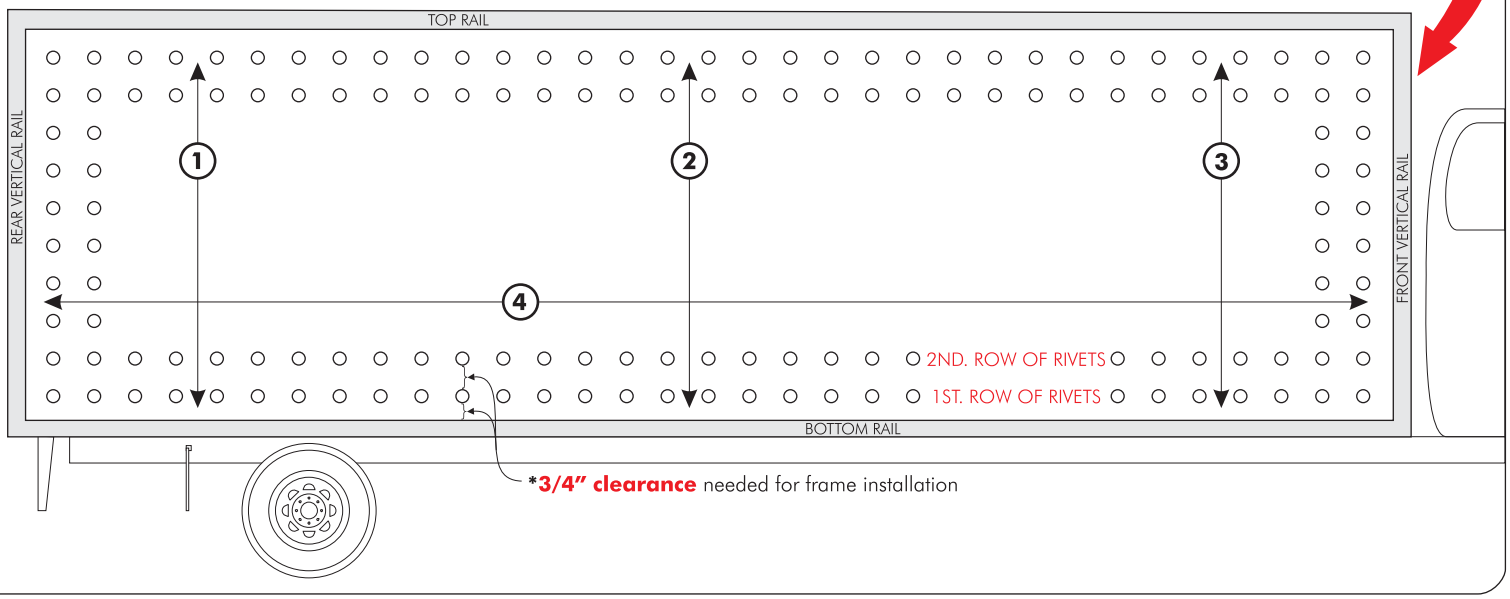

STEP 3: Physically take all measurements A - J, and complete in FEET, INCHES and FRACTIONS! **CRITICAL:** Specify to the 1/8 of an inch.

HEIGHT
Measurements: ① ② ③

	① Rear			② Middle			③ Front		
DRIVER:	A			B			C		
	FEET	INCHES	FRACTION	FEET	INCHES	FRACTION	FEET	INCHES	FRACTION
CURB:	D			E			F		

WIDTH
Measurements: ④

	④ REAR to front			④ FRONT to rear		
DRIVER:	G			H		
	FEET	INCHES	FRACTION	FEET	INCHES	FRACTION
CURB:	I			J		

FRACTIONS
No rounding up

QUESTIONS?

Alex Perez • Measurements & Installations • CELL: (310) 889-5099 • OFFICE: (310) 827-8800
alex@epicmediagroup.com